



# Rapid Pro Heat Pumps

20  
COP



MULTI AWARD  
WINNERS

*Pool equipment experts*



The Rapid Pro has a coefficient of performance (COP) of 20.

Using its power and efficiency, the Rapid Pro can precisely control your pool temperature, adapting its' output to meet your pools' environment.

20  
COP



Premium aluminum exterior casing


State-of-the-art 3D heat exchanger

Built-in WiFi, control anywhere, anytime

Next generation controller  
› Real-time power consumption  
› Tap to wake

## Next generation 3D heat exchanger.

The 3D heat exchanging technology is redefining the titanium heat exchanger, increasing efficiency by 30%.

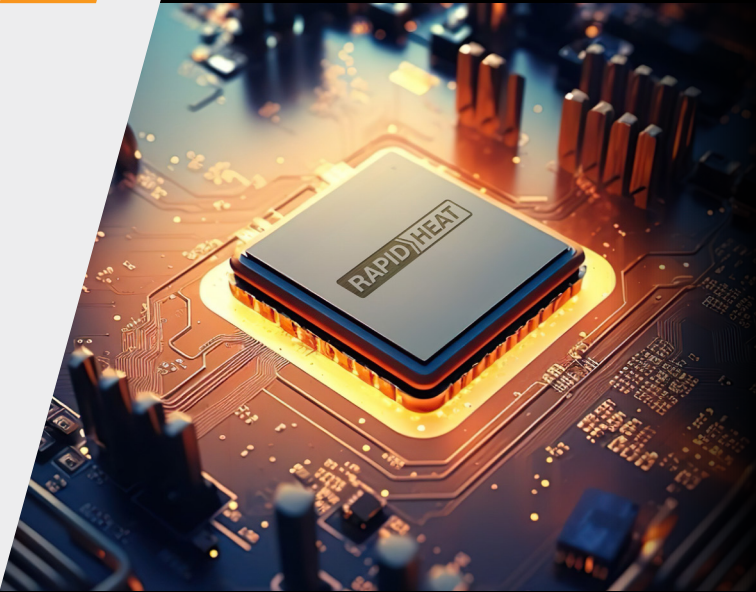

## RapidHeat Technology.

Achieving a 20% faster heating rate, operating at a capacity between 100% and 120% to swiftly reach the desired temperature.

After reaching the target temperature, the heat pump adeptly sustains warm water at an average capacity of 30%, ensuring the desired temperature with minimized noise and remarkable energy savings of 20 times.

# 120%

Faster Heating

# 20x

Energy Saving

# 20x

Quieter Operation

## 3 Intelligent Modes



### Rapid Heat

Heat your swimming pool to the desired temperature in less time, with 120% heating capacity.



### Smart Heat

20~100% heating capacity. Intelligent maintenance of pool temperature together with implementation of matching optimum heating capacity.



### Silence Heat

The compressor and fan provide excellent heating at very low speeds, reducing noise levels to around 36.6 dB(A) at 1m.

# State-of-the-art heat pumps delivering maximum performance



## Product Specifications

Performance Data			RP14	RP16	RP18	RP22	RP26	RP32	RP32T	RP40T
<b>Air 27°C</b>	Heating Capacity	kW	13.5	16.0	18.0	21.5	26.0	31.5	31.5	40.0
<b>Water 26°C</b>	COP		19.6 ~ 7.5	20.1 ~ 7.1	19.2 ~ 7.1	20.5 ~ 7.2	20.3 ~ 7.2	19.6 ~ 7.4	19.6 ~ 7.4	19.8 ~ 7.2
<b>Air 15°C</b>	Heating Capacity	kW	9.0	10.5	12.0	14.5	18.00	22.0	22.0	28.5
<b>Water 26°C</b>	COP		7.9 ~ 5.2	8.8 ~ 5.2	8.0 ~ 5.0	8.8 ~ 5.2	9.3 ~ 5.3	8.1 ~ 5.3	8.1 ~ 5.3	8.0 ~ 4.9
<b>Air 35°C</b>	Cooling Capacity	kW	6.3	9.0	10.0	11.3	13.00	15.0	15.0	19.5
<b>Water 29°C</b>										

Technical Specifications		
Operating Air Temperature	°C	-7.0 ~ 43.0
Refrigerant		R32 GWP (global warming potential) – 675
IPX rating		IPX4
Sound Pressure at 1m	dB(A)	37.8 ~ 45.9 41.0 ~ 46.7 41.5 ~ 47.3 41.9 ~ 49.5 39.7 ~ 49.8 42.1 ~ 50.3 42.1 ~ 50.3 41.5 ~ 50.5
Net Dimensions (L x W x H)	mm	945 x 432 x 660 1045 x 432 x 660 1045 x 432 x 660 1195 x 432 x 760 1072 x 536 x 956 1264 x 536 x 956 1264 x 536 x 956 1364 x 536 x 956
Net / Shipping Weight	Kg	65 / 75 72 / 79 73 / 80 82 / 93 100 / 123 122 / 148 132 / 158 147 / 178
Power Supply	V/Ph/Hz	230/1/50 400/3/50
Electrical Connection		15A plug Hardwired
Running Current Input @ 26° Air	amp	0.51 ~ 7.83 0.58 ~ 9.8 0.68 ~ 11.02 0.75 ~ 12.98 0.96 ~ 15.7 1.2 ~ 18.51 0.4 ~ 6.17 0.51 ~ 8.05
Connection	mm	50
Flow Volume	l/m	67 100 100 140 167 200 200 260



### After sales service

Providing in-house after sales support from our national team elevating the customer experience with convenience, reliability, and personalised attention.

Our commitment to exceptional service sets us apart from our competitors that rely on contractors for after sales support.



Over 35 years of experience in the industry makes us the expert choice for advice, quality products and after sales support.



Head Office	NSW	QLD	SA	ACT	NZ
6-8 Austral Place Hallam VIC 3803	Unit 2, 10 Boden Road Seven Hills NSW 2147	11 Andy Court Upper Coomera QLD 4209	<b>Sahara Pools &amp; Solar</b>	<b>Total Pool &amp; Spa Services</b>	<b>Oasis Heat Pumps</b>
Phone: 03 9887 2131	Phone: 02 9838 0000	Phone: 07 5679 6821	Phone: 0412 204 306	Phone 02 6294 0824	Phone: 09 535 8891

sales@sunloverheating.com.au

[sunloverheating.com.au](http://sunloverheating.com.au)